



Texaco Texclad® 2

Proven performance heavy-duty grease

Product Data Sheet



Product description

Texaco Texclad 2 is a proven performance heavy-duty grease. It is smooth and buttery and highly adhesive, providing high level protection against water wash-out.

Texaco Texclad 2 is formulated with a high viscosity base oil and contains solid graphite and molybdenum disulfide additives ensuring extreme heavy-duty protection. It is also bitumen-free, reducing environmental impact.

Customer benefits

- Tough oil-film performance and solid additives protect against wear under extreme loads
- High level adhesive performance prevents leakage in enclosed spur gears
- Water wash-out resistance suitable for open gear systems
- High viscosity base oils and solid additives are bitumen-free for reduced environmental impact
- No flaking or lumping down to 0°C

Applications

- Texaco Texclad 2 is recommended for use on fifth wheels and open gears in construction machinery, ball mill gears and large enclosed spur gears where oil leakage is a problem.
- Also successfully used to lubricate:
 - Forklift rails and wheel-drive gears
 - Slipper drives (steel mills)
 - Rigs (back-up legs) dredging (cutting heads)
 - Travelling water screens
- Texaco Texclad 2 can also be used at temperatures in excess of 60°C. In this case, the carrier grease will thermally decompose, leaving the solid mineral additives to provide lubrication. About 22% graphite and 3% MoS₂ will remain.

Product highlights:

- Extreme heavy-duty protection
- Resists water wash-out
- Bitumen-free formulation

A Chevron company product

All trademarks are property owned by Chevron Intellectual Property LLC.

Global Lubricants



Approvals and performance specifications

Performance specifications

	DIN 51 502	ISO 6743-09	OPERATING TEMPERATURE
Texclad 2	MF 2C-10 KF 2C-10	ISO-L-XAAIB2	-10°C up to 60°C

Typical test data


TEXCLAD 2 TEST	TEST METHODS	RESULTS
NLGI Grade		2
Product Code		01956
Texture	Visual	Smooth
Colour	Visual	Black
Thickener type	-	Calcium
Thickener content,%	ASTM D0128	16
Worked penetration, 60x, mm/10	ISO 2137	265-295
Base oil type	-	Mineral
Base oil content, %	-	>60
Base oil viscosity at 40 °C, mm ² /s	ASTM D445	>1000
Base oil viscosity at 100 °C, mm ² /s	ASTM D445	33-40
Dropping Point, °C	ISO 2176	106
Four Ball EP - Weld Point, kgf	ASTM D2593	315

The information given in the typical data does not constitute a specification but is an indication based on current production and can be affected by allowable production tolerances. The right to make modifications is reserved. This supersedes all previous editions and information contained in them.



Texaco Texclad® 2

Proven performance heavy-duty grease

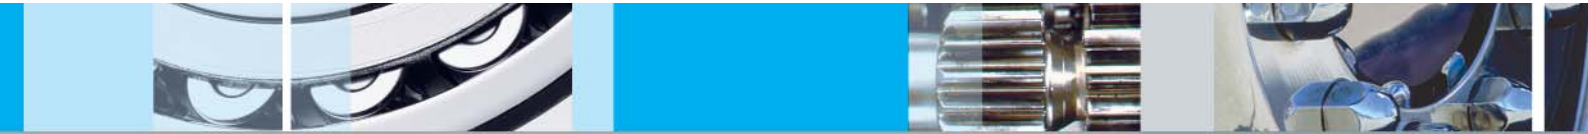

continued

Disclaimer Chevron accepts no liability for any loss or damage suffered as a result of using this product for any application other than applications specifically stated in any Product Data Sheet's.

Health, safety, storage and environmental Based on current available information, this product is not expected to produce adverse effects on health when used for the intended application and in accordance with the recommendations provided in the Material Safety Data Sheet (MSDS). MSDS's are available upon request through your local sales office, or via the Internet. This product should not be used for purposes other than its intended use. When disposing of used product, take care to protect the environment and follow local legislation.

For more information, go to www.chevronlubricants.com

A Chevron company product
All trademarks are property owned by Chevron Intellectual Property LLC.

TXXCLD 2/EE/PDSv1_10/04/2009
© 2009 Chevron Limited. All Rights Reserved.